


# TEKNIC

## FOOT SWITCH FS-99

Foot switch type FS-99 is ideal for any light to medium duty application, with an electrical rating of 10A, 1/2HP 250C AC. It can serve as a foot operated ON / OFF switch for a wide range of motor driven electrical devices. The switch is constructed with a sturdy metal housing and can be used as an independent product, but can also be supplied with an additional GUARD in different colours for certain applications. The combination is a perfect cost effective solution.

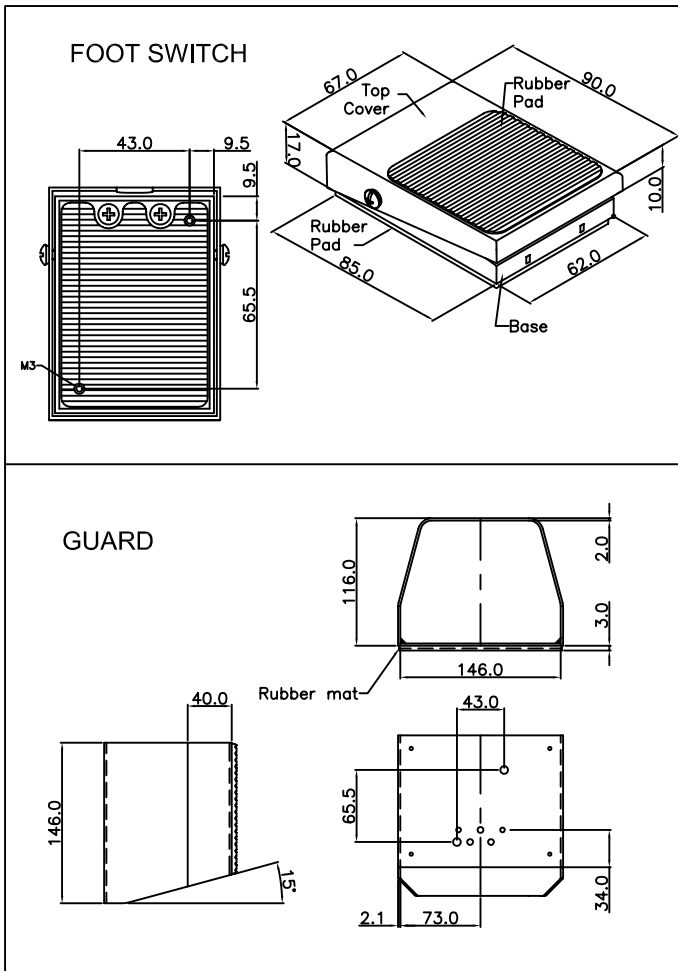

### TECHNICAL SPECIFICATION

Housing	: Steel housing and operating pedal cover
Guard	: Modern design with high quality steel construction and rubber mat. Colours : Bright red, orange, and grey.
Protection level	: IP20
Switch element	: Snap action micro switch, UL / CSA approved. 16A(1/2HP) 250V
Contact type	: Momentary, 1 No.
Cable	: Without cable - we recommend 3 core EPDM rubber insulated cable (or equivalent), size :AWG 18 (16x30), nominal OD :7.75mm rated voltage: 300V, rated current:10A

### Application examples:

- \* Operation of logic signals
- \* Coil winding machine
- \* Photo lab equipment
- \* Sewing machines
- \* Packaging equipment
- \* Conveyor belts
- \* CNC machines

For further details, please write to:

### TEKNIC ELECTROMECONICS PVT. LTD.

Regd. : 36, SNS Chambers, 239, Sankey Road, Bangaluru-560 080  
 Office Tel. 0091-80-23617867, 23619348. Fax. 0091-80-23618607,  
 E-mail : venkatesh@teknicelectromeconics.co.in  
 Website: www.tekniciindia.com  
 Factory : 93, Electronic city Phase 1, 5th cross, Hosur Road, Bangaluru-560 100  
 Tel. 0091-80-28522716,2820389, 28520714. Fax. 0091-80-28520254.  
 E-mail : tepl\_wks@teknico.in & planning@teknicelectromeconics.co.in  
 Head : 703, Madhava, Bandra Kurla Complex, Bandra(East), Mumbai - 400 051.  
 Office Tel. 0091-22-42532500. Fax. 0091-22-26592391  
 Email : teknic@vsnl.com  
 Website: www.teknico.in

WE RESERVE THE RIGHT TO UPGRADE SPECIFICATIONS FOR IMPROVEMENTS WITHOUT ANY PRIOR NOTICE.

All dimensions are in 'mm'